

# Cable Load/Termination



## 700 MHz – 2700 MHz

### Product Specifications



Frequency	700 MHz – 2700 MHz
Impedance ( $\Omega$ ), nominal	50
Input Power (W)	50 / 100 / 100
PIMD	< -150 dBc

Humidity	< 95% Non condensing
Temperature Rating ( $^{\circ}\text{C}$ )	-40 ~ +40
Cable	RG-316 (50W) / RG-141 (100W)
Connectors	N Male / DIN Male

**Part No: TC-50W-0727-NM  
(50 Watt / N Male)**

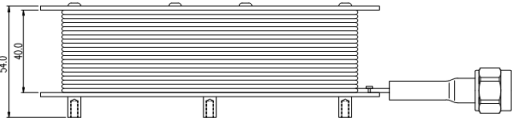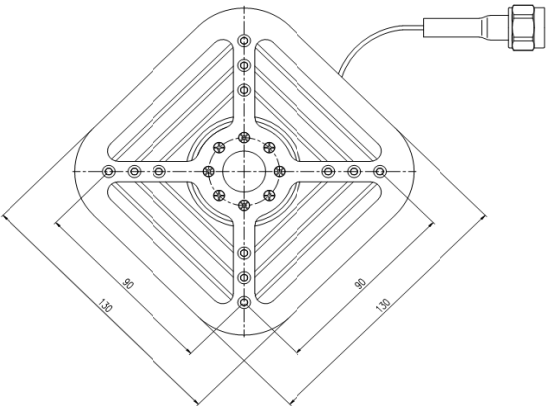

**Part No: TC-50W-0727-DM  
(50 Watt / DIN Male)**

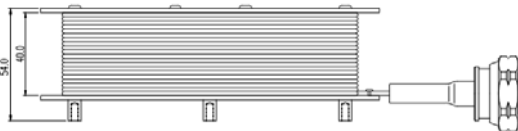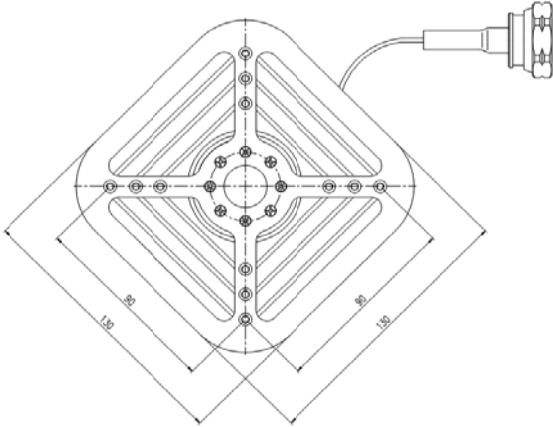

**Part No: TC-100W-0727-DM  
(100 Watt / DIN Male)**

