

TERMINATION SERIES
5W / 10W / 25W / 50W / 100W
Low VSWR / Wideband

PRODUCT SPECIFICATIONS

PART ID	AT-xx-yy
Frequency Range	DC - 3000 MHz
Max Power (CW Avg.)	5W / 10W / 25W / 50W / 100W
50% Overload Rating	30 minutes
VSWR	1.2:1
Impedance, Nominal	50 Ω
Connectors	SM / SF / NM / NF / DM / DF


MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C ~ 80°C
Interface Standards	N Type: MIL-C-39012
	7-16DIN: IEC60169-4
Environment	Indoor

MATERIALS

Body	Aluminum / Brass / Beryllium copper
Plating	Tri-alloy / Silver
Insulator	PTFE
RoHS	Compliant

ORDERING INFORMATION

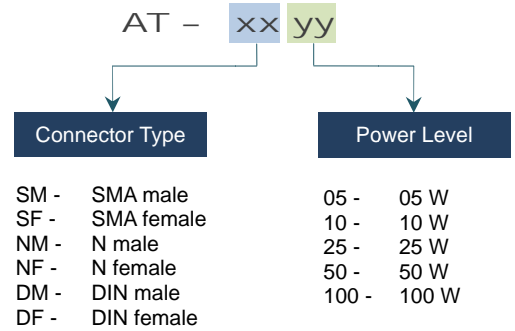

- ✓ Low VSWR
- ✓ Compact Size
- ✓ 7-16 DIN Connectors
- ✓ Wideband Performance DC – 3000MHz

